

## 45Mu 2000mm Roll Water Soluble Film Packaging For Mold Release

Our Product Introduction

for more products please visit us on [pvawatersolublebag.com](http://pvawatersolublebag.com)

### Basic Information

- Place of Origin: China
- Brand Name: Ciyu
- Certification: FDA,SGS, TDS
- Model Number: Ciyu10001
- Minimum Order Quantity: 10Rolls
- Price: US \$0.32-0.80/ Square Meter
- Packaging Details: Carton+Pallet
- Delivery Time: 10-15days
- Payment Terms: L/C, T/T
- Supply Ability: 6,000 kgs per day



### Product Specification

- Working Temperature: 170-180 °C
- Usage: Release Film
- Material: Polyvinyl Alcohol(PVA)
- High Light: Cold Water Soluble Film, Water Soluble Film
- Highlight: **2000mm Water Soluble Film ,  
2000mm PVA Release Film ,  
45Mu PVA Release Film**



### More Images



## Product Description

### Roll Water Soluble Film Packaging For Mold Release , 1000-2000mm Width

#### PVA Film for Mold Releasing

PVA film is an excellent option of mold releasing agent in unsaturated polyester epoxide resin or other thermosetting resin. Currently PVOH film has been widely used in the production of artificial marble, helmets, auto silicone tube and so on.

#### Advantage:

- From the performance, not easy to produce, after stripping blanks, save grinding time.
- With a high degree of softness and smoothness, PVOH film can make a more fitting mold, film of higher quality.
- Heat resistance: can heat up to 190 degree C.
- Good mechanical properties: tensile strength, elongation rate.
- Suitable for continuous production, high efficiency

#### Water-soluble (PVA) film applicaton

Our water soluble film can be used in detergent packaging, such as dish washing detergent for dish-washing machine, washing powder

The PVA film can help to demould in the production of artificial marble, it can be use for water transfer printing.


Our water soluble film is widely used in the agriculture, such as packing the seed and fertilizer.

Our water soluble film can be made into all kinds of PVA bag.

#### Main specification and parameters

Category	parameter		Remark
Thickness	25Mu~45Mu		
Width	1000mm~2000mm		
Length	Regular standard: 1000m Max length: 1500m		Refer to products with 40Mu thickness
Weight	Around 65kg per roll		Refer to products with 40Mu thickness and 1200m length
Paper tube	3 inches		
Transmittance	80°~90°(%)		
Maxum temperature endurance	170°C-180°C		
Water soluble temperature	Normal Temp Type	Under indoor Temperature	Solution rate is in proportion to water temperature.
	Medium Temp Type	Over 40°C	
	High Temp Type	Over 80°C	
Output	Delivery 7~10 days after ordered(normal standard and quantity)		



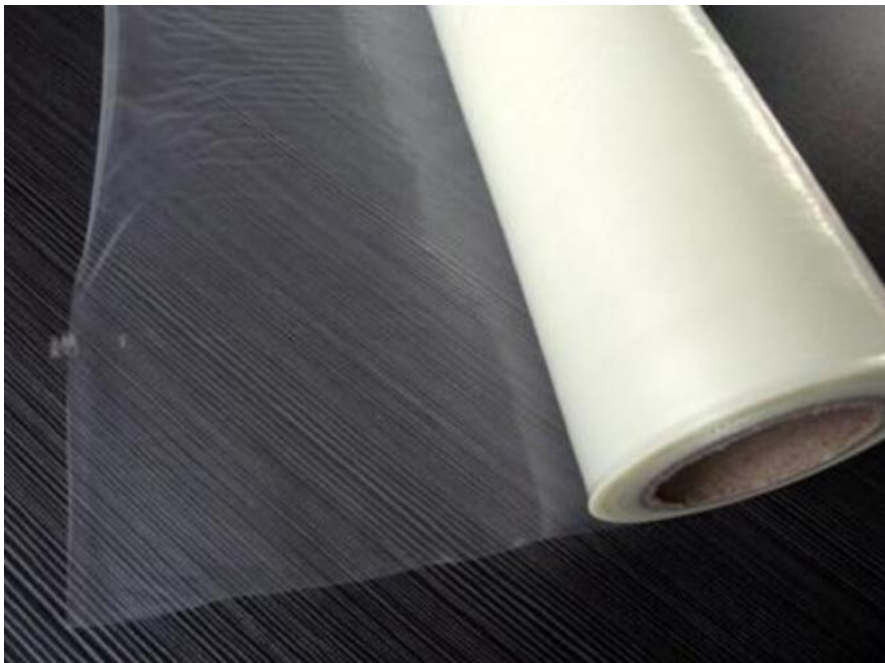

属于环保新材料  
CiYu Polymer

**CiYu Polymer Material (Changzhou) CO.,LTD**



+8615380057551



daisy@ciyupolymer.com



pvawatersolublebag.com

Luoxi Town, Changzhou City, Jiangsu Province, China